

AmericanAirFilter

AmerKool® M81

Demister-Coalescing Pad

- · Low pressure drop
- · Economical in use
- · Long service life

The M81 Demister-Coalescing (D/C) Pad is a heavy duty, highly efficient mist eliminator pad that can be used in different configurations to meet the specific needs of any application. Because the M81 Pad operates at a low pressure drop and is easily replaceable, it is economical to use in a variety of ventilation, air-conditioning systems and machinery air intake systems. The unique construction of the M81 D/C Pad provides excellent free moisture removal at velocities up to 12.2 ft/s (4 m/s).



M81 D/C Pads should be used for the elimination of mist/free moisture from the environment or caused by processes in the immediate area of the intake. They are typically used in coastal areas, behind air washers, and at plant sites that have long periods of heavy rain and/or frequent heavy fog/mist. The M81 D/C Pads can be used in two configurations with increasing degrees of effectiveness.

- A) A weatherhood with a M81 D/C pad is effective under moderate moisture conditions or where heavy moisture conditions exist occasionally.
- B) A weather louver with a M81 D/C pad is well suited for heavy moisture conditions.

Drain shelves and troughs or trapped drains should always be provided when heavy moisture is anticipated. AAF demister sections are available with integral drainage systems designed to meet each application's specific needs.



Construction

The M81 Demister-Coalescing Pad Media is made from a 3 inch (75 mm) thick blanket of continuous filament glass fibers. A specially formulated water resistant binder is applied during the glass spinning process allowing the media to maintain its thickness and resiliency when saturated. The pads are also made with an exclusive two-stage density, consisting of an open weave fiber pattern on the air entering side and a tighter weave on the air leaving side. This unique construction permits use of the full depth of the pad, thus increasing the amount of water each pad can hold.

Specifications

The media is 3 inch (75 mm) thick. It is gold with a blue tint on the air leaving side. The glass fibers have been sprayed with a water resistant binder that enables the media to maintain its thickness and resiliency while saturated with water. The media is supplied in pre-cut pads. Pre-cut pads are packaged in a corrugated fiber board box. Each box contains 20 pads.


AmericanAirFilter

AmerKool® M81


Product Information

Standard size pads			
Actual Si	ze inch	Quantity per carton	Shipping Wt. per carton kg/lbs
508x508x75 635x635x75	20x20x3 25x25x3	20	3.5/7.7 5.0/11.0

Possible Configurations

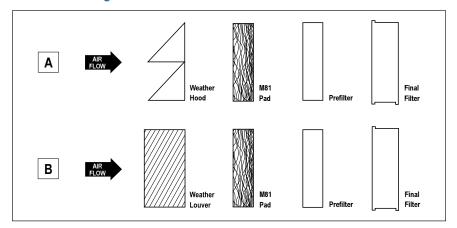


Performance Data



Pressure Drop versus Flow Rate 200.0 Pressure Drop (Pa) 160.0 120.0 80.0 40.0 1000 4000

Flow Rate (m³/hr)

Fractional Efficiency versus Particle Diameter @ 625 ft/min velocity



Contact Information

AAF Ltd

Bassington Lane, Cramlington Northumberland NE23 8AF, UK Telephone: ++44 1670 713477 Fax: ++44 1670 714370

AAF-McQuay Inc. 10300 Ormsby Park Place Suite 600, Louisville KY 40223 USA Telephone: ++1 502 637 0411 Toll Free: 888 AAF 3596 Fax: ++1 502 637 0401

AAF-International B.V. PO Box 7928 1008 AC Amsterdam The Netherlands Telephone: ++31 20 54 94 411

Fax: ++31 20 64 44 398

AAF SA Rue William Dian, Boite Postale 3 27620 Gasny, France Telephone: ++33 232 536060 Fax: ++33 232 521917

AAF-Lufttechnik GmbH Gernostraße 23 44319 Dortmund, Germany Telephone: ++49 231 921033-13 Fax: ++49 231 921033-23

AAF-S.A. C/Urartea 11, P. Industrial Ali-Gobeo 01010 Vitoria, Spain Telephone: ++34 945 241 800 Fax: ++34 945 248 086

AAF S.r.l. Via E. Mattei 11 22076 Mozzate-Co, Italy Telephone: ++39 0331 838611 Fax: ++39 0331 838644

7000

AAF-Luftreinigungssysteme Ges.m.b.H IZ NOe Sued, Strasse 16, Objekt 61 A-2355 Wr. Neudorf, Austria Telephone: ++43 2236 677628 Fax: ++43-2236-677628-1

AAF McQuay PO Box 28564, Dubai Telephone: ++971 433 90894 Fax: ++971 433 80028

AAF WUHAN Co Ltd WUHAN, CHINA

Telephone: +86 27 8423 6698 Fax: +86 27 8423 6646

ISO Certified 9001-2000

AAF has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice.

©2007 AAF International MFAS-1-325B APR '07 00M



Fractional Efficeincy (%)