

HydroCel



CLEAN AIR
FOR GAS TURBINES



REFINED FILTRATION AGAINST
SALT AND SEAWATER

HydroCel Familiar with the problem

A gas turbine consumes vast amounts of atmospheric air heavily contaminated in offshore locations by natural pollutants such as salt and seawater spray, plus those self generated from drilling, shotblasting and engine exhausts. As an accumulated mass in fluctuating humidity, these pollutants can seriously effect the performance and operating efficiency of a precision gas turbine engine.

- Abrasive solids attack rotating parts.
- Dirt in the compressor stage is responsible for blade fouling which contributes to an alteration in profile and losses in efficiency.
- Fouling in the intercoolers reduces compression heat removal.
- Wet corrosion caused by salt can lead to damage particularly in the compressor stages.
- High temperature corrosion at the turbine stage is primarily a fuel problem but air pollution adds to any corrosion damage.
- Plugging of the turbine blade cooling slits is caused by sub-micron particles which promotes fatigue from overheating.

The implication in terms of efficiency and operating cost are significant so they must be addressed.

- A loss in mass flow through the compressor stages increases heat rate.
- Continuous full load situations affected by out of limits fuel-air cleanliness may loose essential power output.
- Repair and maintenance costs including water wash frequency cycles are increased by poor quality air.
- Replacement parts especially turbine blades are a horrendous cost if the expected service life is not achieved.


Key points for Turbine Efficiency.

Erosion	Fouling	Corrosion
-	Keep within concentration limits	
-	Reduce high cost of maintenance and repair	
-	Achieve constant full load capability	

HydroCel

95 & H12

Filtration in Depth

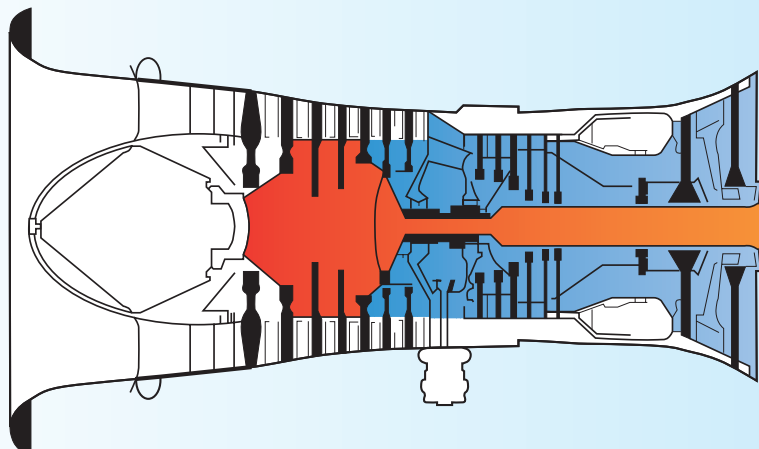

HydroCel Providing the solution


HydroCel 95 has achieved a remarkable reputation for providing clean air to gas turbines operating in the hostile environment prevailing offshore and in coastal locations. Operators have achieved air cleanliness not previously found and have moved quickly to establish the HydroCel as their number one choice to remove sea-salt and water, in addition to the locally generated industrial pollution.

HydroCel 95 Proven Technology

HydroCel H12 is a complementary product which has been developed using the same special construction, but with a very high performance media. With this product, continuous turbine operation with only one or two water wash cycles per year can be achieved.

The H12 significantly contributes towards less downtime and higher production with even longer turbine component life than that achieved by the HydroCel 95.


HydroCel H12 Advanced Technology

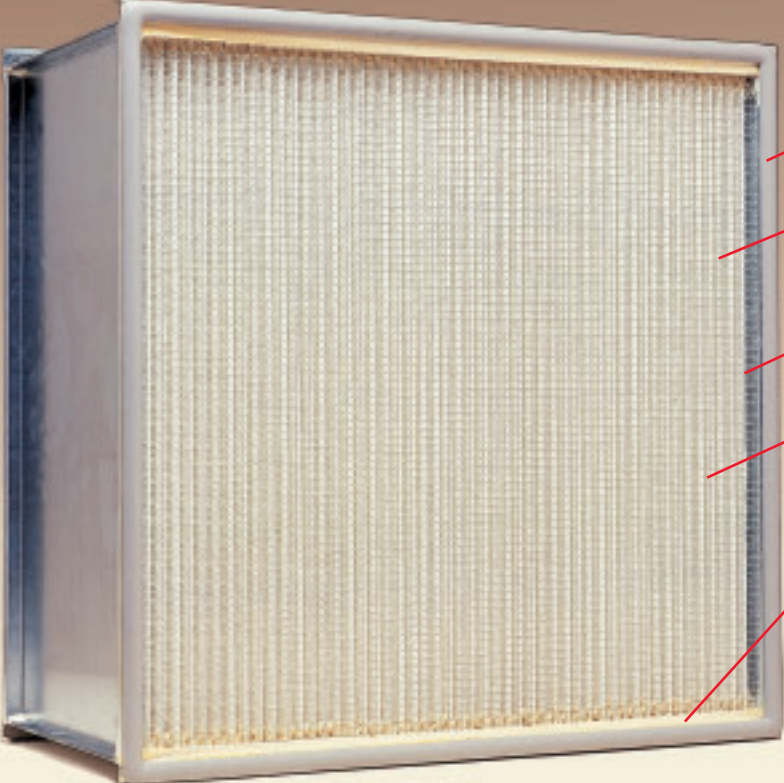

Key Features

- New ground breaking technology to keep supply air within salt solution limits.
- Outer casing 16 swg to increase body strength.
- Tapered plastic spacers which eliminate salt corrosion and improve flow characteristics.
- Free flow Polyurethane seal based on H13 standards.
- New Media is water repellent in clean and dirty condition.
- Continuous gasket to secure housing seal.

HydroCel 95 & H12 solves the problem of excess salt solution which is essential for the protection against turbine blade fouling and corrosion.



AAF[®]
POWER & INDUSTRIAL

HydroCel 95 & H12

Total Reassurance

Seawater Removal

In the absence of an independent water penetration test facility, AAF built a special rig in Cramlington which simulated offshore marine conditions. The procedure was to measure seawater penetration through a filter in the clean condition. A dirty condition was then created by introducing sea salt, Hydrocarbons and Ashrae test dust up to the change pressure drop. Further seawater penetration tests were carried out to confirm removal efficiency is consistent over the filter life cycle.

Droplet Removal - Particulate Efficiency

Particle size Microns	Initial Efficiency %	
	95	H12
0.3 - 0.4	66.72	99.82
0.4 - 0.55	72.68	99.93
0.55 - 0.7	78.77	99.97
0.7 - 1.0	84.38	99.99
1.0 - 1.3	90.16	100.00
1.3 - 1.6	92.92	100.00
1.6 - 2.2	95.12	100.00
2.0 - 3.0	98.78	100.00
3.0 - 4.0	99.88	100.00
4.0 - 5.0	99.98	100.00
5.0 and above	99.99	100.00

Performance Data

Volumetric Air Flow

Type - HydroCel	95		H12	
m3/hr (cfm)	3400 (2000)	4250 (2500)	5100 (3000)	4250 (2500)

Initial Resistance Pa (inch wg)	110 (0.44)	155 (0.62)	210 (0.84)	500 (2.0)
------------------------------------	---------------	---------------	---------------	--------------

Final Resistance Pa (inch wg)	635 (2.5)	635 (2.5)	635 (2.5)	635 (2.5)
----------------------------------	--------------	--------------	--------------	--------------

Average Atmosphere Dust Spot Efficiency	97	93	91	99.97
--	----	----	----	-------

Ac Fine D.H.C.	1400	1100	950	650
----------------	------	------	-----	-----

Filter Class	F9	F8	F8	H12
--------------	----	----	----	-----

Humidity	100%	100%	100%	100%
----------	------	------	------	------

Available in standard size 592x592x292mm (23⁵/₁₆x23⁵/₁₆x11¹/₂ inches)

Test results and performance data sourced from independent air filter testing authority

GLOBAL SALES & MARKETING websites www.aafintl.com & www.aafeurope.com

USA
AAF McQUAY Inc.
10300 ORMSBY PARK PLACE
SUITE 600
LOUISVILLE KY 40223, USA
TELEPHONE: +1 502 637 0408
TELEFAX: +1 502 637 0147
TOLL FREE: 888 AAF 3596

SPAIN
AAF-SA
CALLE URARTEA 11
P. INDUSTRIAL ALI-GOBEO
SPAIN
TELEPHONE: +34 945 241 800
TELEFAX: +34 945 248 086

ITALY
AAF-S.R.L.
VIA E. MATTEI, 11
22076 MOZZATE-CO
ITALY
TELEPHONE: ++39 0331 838 611
TELEFAX: ++39 0331 838 644

FRANCE
AAF-SA
RUE WILLIAM DIAN
BOITE POSTALE 3
27620 GASNY
FRANCE
TELEPHONE: +33 232 536 060
TELEFAX: +33 232 521 917

DUBAI
AAF McQUAY
PO BOX 28564
DUBAI
TELEPHONE: ++971 433 90894
TELEFAX: ++971 433 80028

THE NETHERLANDS
AAF INTERNATIONAL B.V.
EGELBURG 2.
P.O BOX 7928
1008 AC AMSTERDAM
THE NETHERLANDS
TELEPHONE: 31 20 549 4411
TELEFAX: 31 20 644 4398

UNITED KINGDOM
AAF-LTD
BASSINGTON LANE
CRAMLINGTON
NORTHUMBERLAND NE23 8AF
UNITED KINGDOM
TELEPHONE: +44 1670 713477
TELEFAX: +44 1 670 714370

MEXICO
AAF, S.A DE C.V.
PRIMERO DE MAYO 85
TLALNEPLANTLA
ESTADO DE MEXICO
54040 MEXICO
TELEPHONE: ++525 5556 55200
TELEFAX: ++525 5539 05814